



Chelsea ReadyFlow™ 60

Features and Benefits

- Suitable for use in Sustainable Urban Drainage Systems
- Tumbled concrete block permeable paving with a traditional appearance similar to Chelsea 60
- Create random patterns with mixed sizes
- Compatible with Chelsea Kerb and Kerb-Sett
- Provides a drainage capacity in excess of 2.25 l/m²/sec
- Suitable applications; residential and pedestrianised areas
- Manufactured to BS EN 1338:2003

Choice of colours




Autumn Hue




Burnt Elm



Burnt Ember

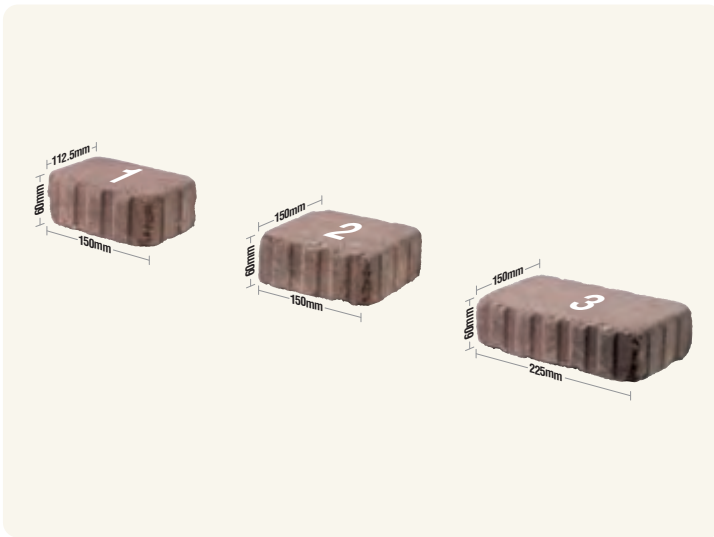

Chelsea ReadyFlow™ 60 laying patterns



45° or 90° Herringbone patterns (using Sett 3)



Traditional Formal Bond pattern (using Sett 1, 2 & 3)



Technical Data

	Sett 1	Sett 2	Sett 3
Dimensions (mm)	150x112.5x60	150x150x60	225x150x60
Blocks per m ²	59.3	44.4	29.6
Weight (kg)	2.08	2.76	4.21
Blocks per m ² for 45° Herringbone pattern			29.6
Blocks per m ² for 90° Herringbone pattern			29.6
Blocks per m ² for Traditional Formal Bond pattern	13.6	13.3	13.9