

Dry Verge System


The Russell Dry Verge System is a high quality purpose designed mechanically fixed and mortarless verge finish which requires no maintenance.

It comprises of:

- Individual units for left or right hand verge.
- High quality grade PVC-u.
- PVC-u ridge end caps suitable for use with dry or bedded ridge.
- When used at top edge abutment, lead flashing to be dressed over the top of the verge unit, in accordance with L.S.A. guidelines.
- Suitable for normal batten gauges between 305mm and 345mm.
- Manufactured in brown, dark grey and terracotta to contrast or compliment any application.
- Can be fixed in all weather conditions.
- Maintenance free.
- No special tools required.
- Eliminates the need for wet mortar and undercloak.
- Sealing strip prevents the ingress of rain into the verge system.
- Standard Verge Unit gives neat attractive appearance, compatible with all Russell standard interlocking profiles.
- Thin Leading Edge, compatible with Galloway and Lothian tiles.
- Allows normal headlap variation.
- Interlocking feature prevents units from disengaging.
- Verge stop end prevents ingress of birds and vermin into the roof void.
- Maximum pitch 45°, minimum pitch as recommended for tile profile.



Components

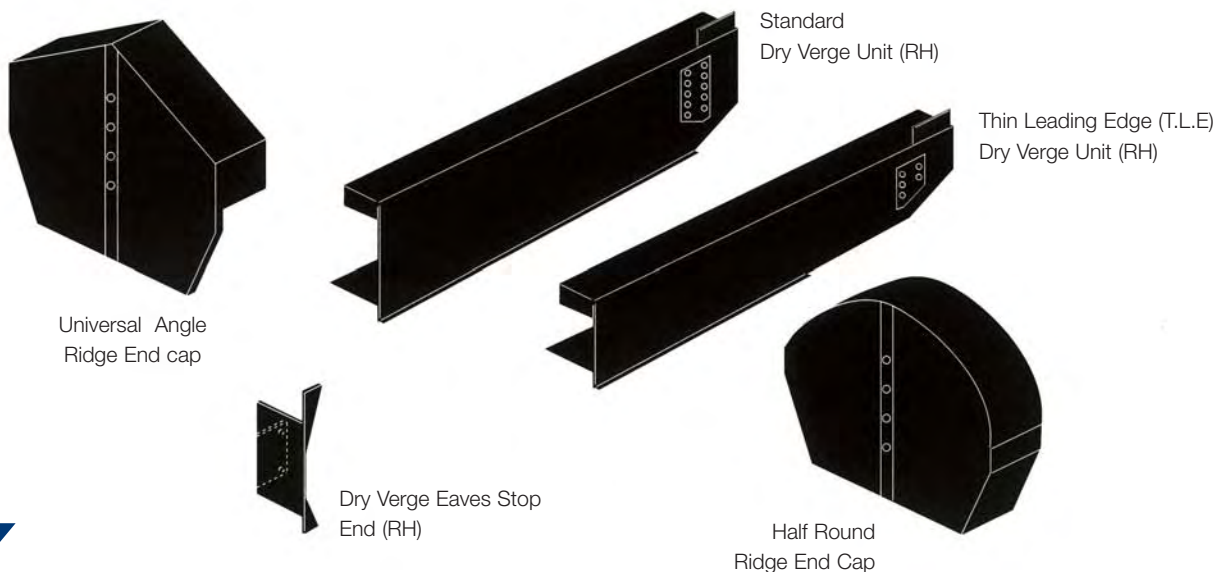

CEMEX Roof Tiles

Nicolson Way, Wellington Road, Burton-on-Trent, Staffordshire, DE14 2AW
Tel: 01283 517070 Fax: 01283 516290

www.cemex.co.uk